


HURRICANE™

ULTRA ULV/MIST SPRAYER

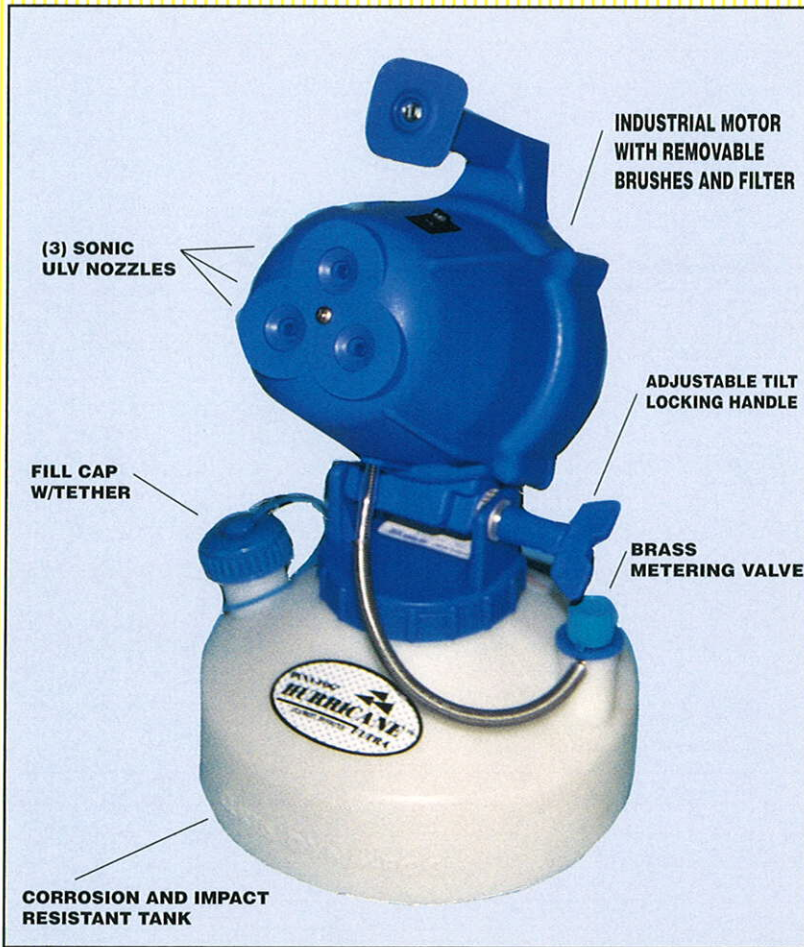

SPECIFICATIONS

MODEL 2794 (110 v AC)
 MODEL 2796 (220 v AC)
 110/120 v AC 220/240 v AC
 6.5 AMPS 3.5 AMPS
 50/60 HZ. 50/60 HZ.
 FLOW RATE: 0-4.5 U.S. GPH
 0-17LPH

DROPLET SIZE: 10-12 MICRON (MMD)

VARIOUS OIL DILUENTS CAN ALTER THE DROPLET SIZES TO BETWEEN 5 AND 50 MICRONS

TANK CAPACITY: 1 U.S. GAL. / 3.8 LITERS

MACHINE DIMENSIONS:

TANK DIAMETER: 12 IN / 30.48 CM
 MACHINE HEIGHT: 14 IN / 35.6 CM
 WEIGHT (EMPTY): 6.6 LBS. / 3.0 KG.

SHIPPING DATA:

LENGTH 16.25 IN / 41.3 CM
 WIDTH 12.5 IN / 31.75 CM
 HEIGHT 16.5 IN / 41.91 CM
 WEIGHT 10.0 LBS. / 4.5 KG.
 VOLUME (CUBE) 1.9 ft³ / .05 m³

TO MAINTAIN THE HIGHEST QUALITY CURTIS DYNA-FOG LTD. RESERVES THE RIGHT TO MAKE TECHNICAL MODIFICATIONS AT ANY TIME WITHOUT NOTICE.

1 YEAR LIMITED WARRANTY

The **HURRICANE ULTRA™** is ideal for use in spraying industrial and residential areas. Farms, greenhouses, warehouses, animal care facilities and disease control programs are just a few of the markets where the HURRICANE ULTRA is used. Some commonly sprayed solutions are:

- Insecticides
- Disinfectants
- Deodorizers
- Fungicides
- Odor Neutralizers
- Water (Humidification)
- Germicides
- Poultry Vaccines

- RUGGED DESIGN HANDLES CORROSIVE LIQUIDS AND HEAVY IMPACTS!
- SOLID BRASS METERING VALVE FOR DELIVERING PRECISE OUTPUTS AND MAXIMIZING USE OF CHEMICALS!
- LOW PROFILE TANK DESIGN VIRTUALLY ELIMINATES TIPPING...EMPTY OR FULL!
- DROPLET SIZES CAN BE CONTROLLED FOR BOTH ULV SPRAYING AND RESIDUAL SPRAYING

DYNA-FOG® IS A REGISTERED TRADE MARK OF CURTIS DYNA-FOG LTD.
 HURRICANE™ IS A TRADEMARK OF CURTIS DYNA-FOG LTD.
 CERTIFIED TO COMPLY WITH THE CE STANDARDS OF THE EUROPEAN UNION.

P.O. Box 297 17335 US 31 North
 Westfield, Indiana 46074-0297 USA

CURTIS **DYNA-FOG**® Ltd.

PH: 317.896.2561 FAX: 317.896.3788
 E-Mail: dynafog@iquest.net
www.dynafog.com